

Bridging of Media Data Interfaces over Multimedia Serial Links

Vladimir Zapolskiy <vladimir@tuxera.com> Tuxera Inc.
Automotive Linux Summit 2019 July 18, 2019



Vladimir Zapolskiy



Embedded Linux Engineer at Tuxera

- Performance analysis and improvements
- Development in the Linux kernel space
- Consulting and maintenance



Open Source Contributor

- Linux kernel
- U-Boot
- OpenEmbedded

Summary of presentation

- FPD-Link III hardware description
- TI DS90Ux9xx serializers and deserializers
- Bridging functionality of DS90Ux9xx ICs
- Selection of Multifunction device driver framework for implementation
- Display controller to FPD-Link III to display panel
- Camera sensor to FPD-Link III to image signal controller
- Audio bridging
- Current status and future work


FPD-Link III

Features

- Bidirectional channel transfer of control signals
- Up to 3Gbit/s data transfer speed
- Media contents with HDCP support
- Power Over Coax

Applications

- Automotive Infotainment Systems
- Automotive Camera Interfaces
- Security and Surveillance
- Industrial and Medical Imaging

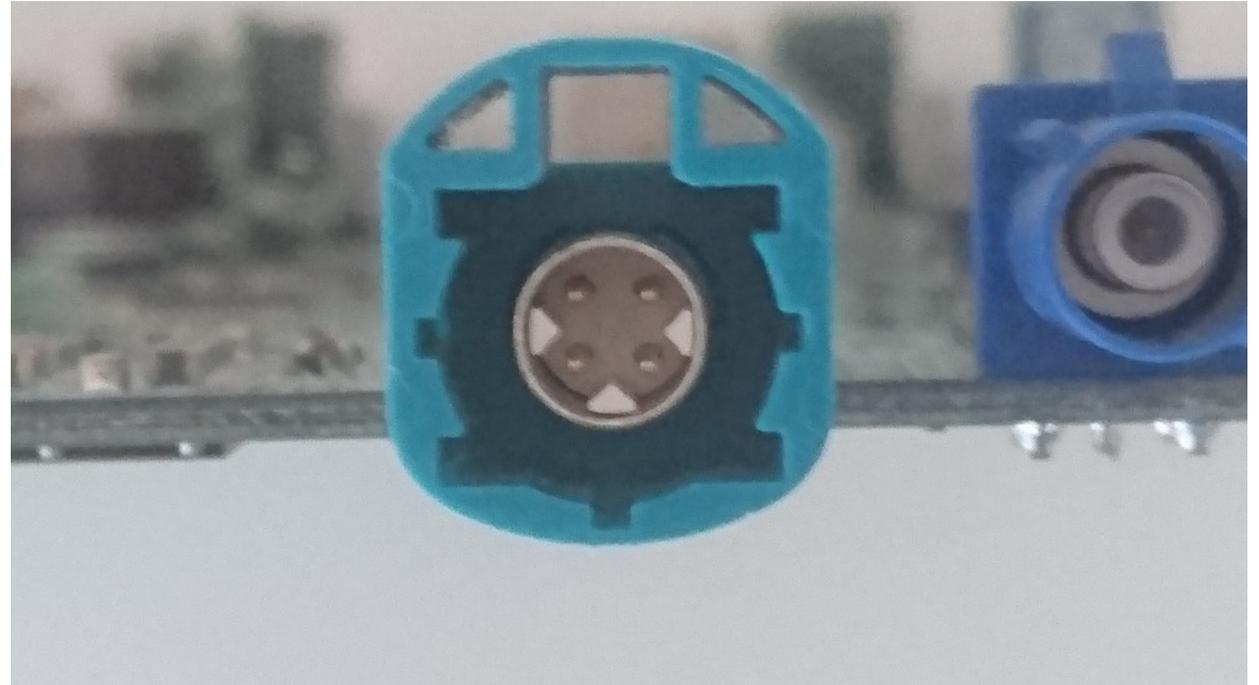

TI DS90Ux9xx FPD-Link III ICs

Serializers of media data to FPD-Link III (hint: last digit of IC name is odd)

- Supported video interfaces as **input**:
 - Parallel RGB/YUV, 10-bit, 12-bit, 14-bit, 18-bit, 24-bit
 - LVDS
 - HDMI
 - MIPI CSI-2
 - MIPI DSI

Deserializers from FPD-Link III to media data (hint: last digit of IC name is even)

- Supported video interfaces as **output**:
 - Parallel RGB/YUV, 10-bit, 12-bit, 14-bit, 18-bit, 24-bit
 - LVDS
 - MIPI CSI-2
- May serve as hubs

TI DS90Ux9xx FPD-Link III Serializer ICs

IC	Input format	Additional Features	Supported
DS90Ux901	Parallel 14-bit		No
DS90Ux913	Parallel 12-bit		Yes
DS90Ux921	Parallel 24-bit		No
DS90Ux925	Parallel 24-bit	HDCP, backward compatible	Yes
DS90Ux927	LVDS	HDCP	Yes
DS90Ux929	HDMI	HDCP	Yes
DS90Ux933	Parallel 12-bit	PoC	No
DS90Ux935	MIPI CSI-2	PoC	No
DS90Ux941	MIPI DSI	HDCP	No
DS90Ux947	LVDS	HDCP	Yes
DS90Ux949	HDMI	FPD-Link III Dual Lane	No
DS90Ux953	MIPI CSI-2	PoC	No

TI DS90Ux9xx FPD-Link III Deserializer ICs

IC	Output format	Additional Features	Supported
DS90Ux902	Parallel 14-bit		No
DS90Ux914	Parallel 12-bit		No
DS90Ux924	LVDS	backward compatible	No
DS90Ux926	Parallel 24-bit	HDCP, backward compatible	Yes
DS90Ux928	LVDS	HDCP, backward compatible	Yes
DS90Ux934	Parallel 12-bit	PoC	No
DS90Ux936	MIPI CSI-2	PoC, FPD-Link III Dual Lane	No
DS90Ux940	MIPI CSI-2	HDCP, FPD-Link III Dual Lane	Yes
DS90Ux948	LVDS	FPD-Link III Dual Lane	No
DS90Ux954	MIPI CSI-2	FPD-Link III Dual Lane	No
DS90Ux960	MIPI CSI-2	FPD-Link III Quad Lane	No
DS90Ux962	MIPI CSI-2	PoC, FPD-Link III Quad Lane	No
DS90Ux964	MIPI CSI-2	PoC, FPD-Link III Quad Lane	Yes


TI DS90Ux9xx IC features apart of Video Bridging

- I2S audio data bridging
- Supports bidirectional bridging of control interfaces:
 - I2C
 - GPIOs: direct control and GPIO signal bridging
 - Interrupts
 - Overview of TI DS90Ux9xx control interface bridging:

https://static.sched.com/hosted_files/ossalsjp18/8a/vzapolskiy_als2018.pdf

For simplicity and flexibility the implementation of device drivers to support TI DS90Ux9xx ICs is based on MFD framework, because IC subblocks are independent and reused over the IC series.

Why Multifunction Device Driver?

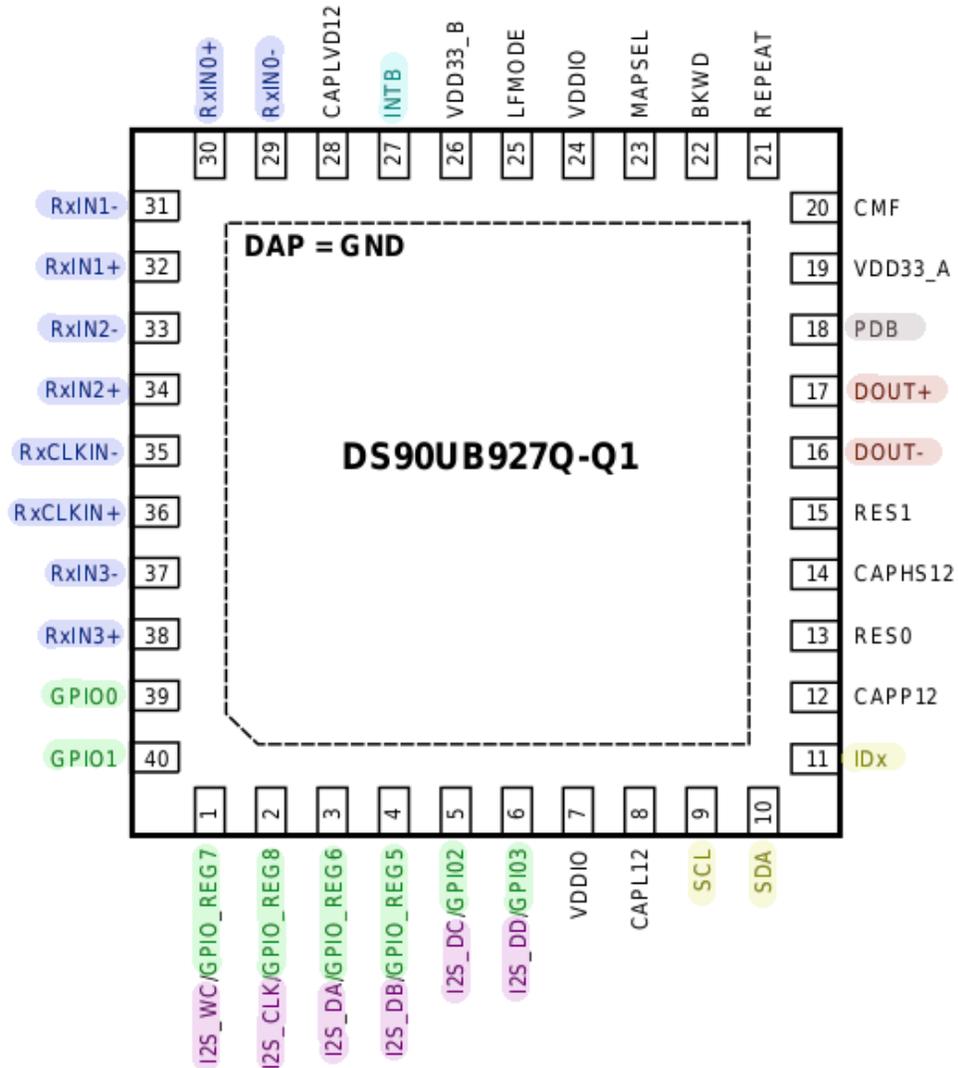

```

serializer: serializer@c {
    compatible = "ti,ds90ub927q", "ti,ds90ub927q";
    reg = <0xc>;
    power-gpios = <&gpio5 10 GPIO_ACTIVE_HIGH>;

    i2c-bridge {
        compatible = "ti,ds90ub927q-i2c-bridge";
        ti,i2c-bridges = <&deserializer 0 0x3b>;
        ti,i2c-bridge-maps = <0 0x4b 0x60>, <0 0x50 0x52>;
    };

    ds90ub927_pctrl: pin-controller {
        compatible = "ti,ds90ub927b-pinctrl", "ti,ds90ub927b-pinctrl";
        gpio-controller;
        #gpio-cells = <2>;
        gpio-ranges = <&ds90ub927_pctrl 0 0 8>;

        led_pins: pinmux {
            gpio-remote {
                pins = "gpio2";
                function = "gpio-remote";
            };
        };
    };

    video-bridge {
        compatible = "ti,ds90ub927q-video-bridge", "video-bridge";


        ports {
            #address-cells = <1>;
            #size-cells = <0>;

            port@0 {
                reg = <0>;
                ds90ub927_lvds: endpoint {
                    remote-endpoint = <&lvds1_out>;
                };
            };

            port@1 {
                reg = <1>;
                ds90ub927_fpd: endpoint {
                    remote-endpoint = <&ds90ub928_fpd>;
                };
            };
        };
    };
};
    
```

Display Controller to FPD-Link III to Display Panel

- TI DS90Ux9xx deserializer and serializer ICs operate as **transparent** video bridges
- Video **format** conversion may happen
- Naturally maps into the Linux DRM framework as a chain of two video bridges

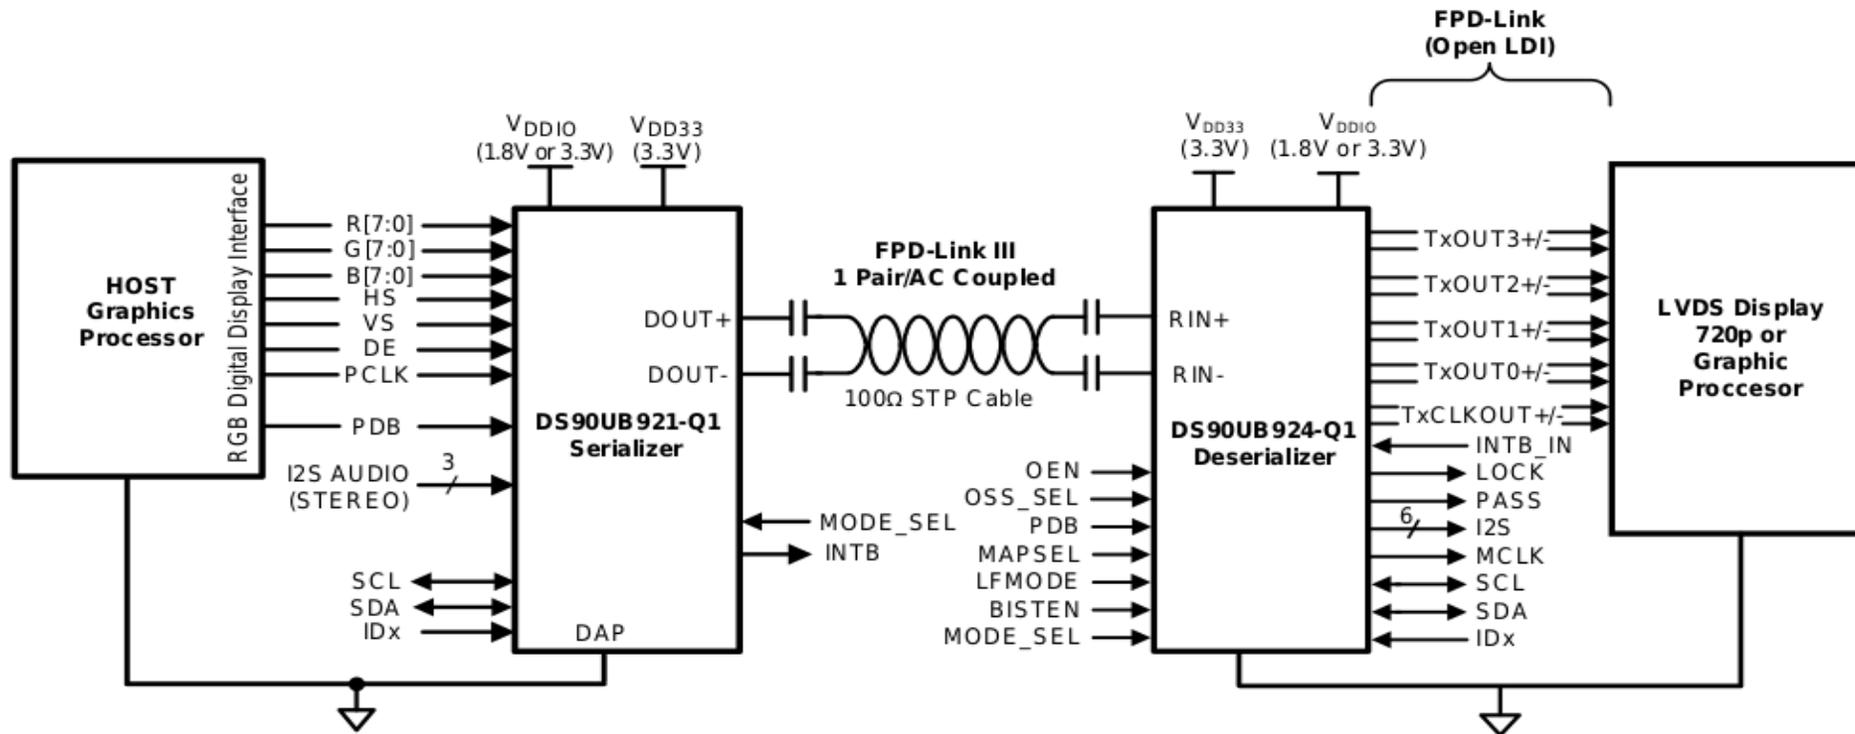

Copyright © 2016, Texas Instruments Incorporated

Display Controller to FPD-Link III to Display Panel

```
deserializer: deserializer {
    compatible = "ti,ds90ub928q", "ti,ds90ux9xx";

    i2c-bridge {
        compatible = "ti,ds90ux9xx-i2c-bridge";
        #address-cells = <1>;
        #size-cells = <0>;
    };

    video-bridge {
        compatible = "ti,ds90ux9xx-video-bridge", "video-bridge";

        ports {
            #address-cells = <1>;
            #size-cells = <0>;

            port@0 {
                reg = <0>;
                ds90ub928_fpd: endpoint {
                    remote-endpoint = <&ds90ub927_fpd>;
                };
            };

            port@1 {
                reg = <1>;
                ds90ub928_output: endpoint {
                    remote-endpoint = <&panel_input>;
                };
            };
        };
    };
};
```

```
&ldb {
    status = "okay";

    lvds-channel@1 {
        status = "okay";
        fsl,data-mapping = "jeida";
        fsl,data-width = <24>;

        port@4 {
            reg = <4>;

            lvds1_out: endpoint {
                remote-endpoint = <&ds90ub927_lvds>;
            };
        };
    };
};
...
serializer: serializer@c {
    compatible = "ti,ds90ub927q", "ti,ds90ux9xx";
    reg = <0xc>;

    i2c-bridge {
        compatible = "ti,ds90ux9xx-i2c-bridge";
        ti,i2c-bridges = <&deserializer 0 0x3b>;
        ti,i2c-bridge-maps = <0 0x4b 0x60>, <0 0x50 0x52>;
    };

    video-bridge {
        compatible = "ti,ds90ux9xx-video-bridge", "video-bridge";


        ports {
            #address-cells = <1>;
            #size-cells = <0>;

            port@0 {
                reg = <0>;
                ds90ub927_lvds: endpoint {
                    remote-endpoint = <&lvds1_out>;
                };
            };

            port@1 {
                reg = <1>;
                ds90ub927_fpd: endpoint {
                    remote-endpoint = <&ds90ub928_fpd>;
                };
            };
        };
    };
};
```

Camera Sensor to FPD-Link III to Image Signal Controller

- TI DS90Ux9xx serializer and deserializer ICs operate as **transparent** video bridges
- Video **format** conversion may happen
- Naturally maps into the Linux V4L2 framework as a chain of two video bridges

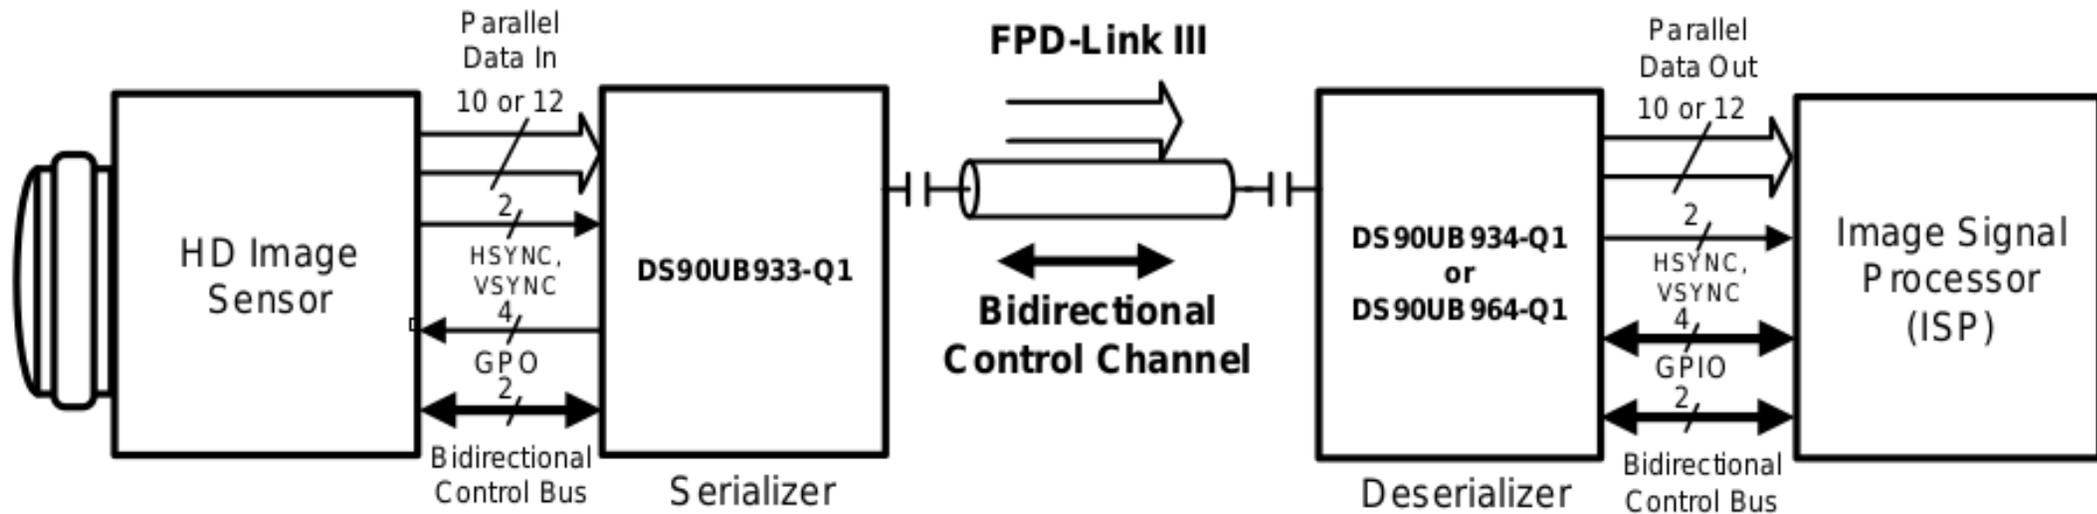

Camera Sensor to FPD-Link III to Image Signal Controller

```
external-pcbs {
    camera_0: pcb-camera-0 {
        compatible = "ti,ds90ub913q", "ti,ds90ux9xx";

        i2c-bridge {
            compatible = "ti,ds90ux9xx-i2c-bridge";
            #address-cells = <1>;
            #size-cells = <0>;

            camera-sensor@30 {
                compatible = "ovti,ov10635";
                reg = <0x30>;
            };
        };
    };

    camera_1: pcb-camera-1 {
        compatible = "ti,ds90ub913q", "ti,ds90ux9xx";

        i2c-bridge {
            compatible = "ti,ds90ux9xx-i2c-bridge";
            #address-cells = <1>;
            #size-cells = <0>;

            camera-sensor@30 {
                compatible = "ovti,ov10635";
                reg = <0x30>;
            };
        };
    };

    ...
};

deserializer@30 {
    compatible = "ti,ds90ub964q", "ti,ds90ux9xx";
    reg = <0x30>;
    #address-cells = <1>;
    #size-cells = <0>;

    i2c-bridge@31 {
        compatible = "ti,ds90ux9xx-i2c-bridge";
        reg = <0x31>;
        ti,i2c-bridges = <&camera_0 0 0x70>;
        ti,i2c-bridge-maps = <0 0x30 0x71>;
    };

    i2c-bridge@32 {
        compatible = "ti,ds90ux9xx-i2c-bridge";
        reg = <0x32>;
        ti,i2c-bridges = <&camera_1 1 0x72>;
        ti,i2c-bridge-maps = <1 0x30 0x73>;
    };

    ...

    video-bridge {
        compatible = "ti,ds90ub9xx-mipi-csi2";

        port {
            ds90ub964_1: endpoint {
                remote-endpoint = <&csi2_40_0_in>;
                data-lanes = <1 2 3 4>;
                clock-lanes = <0>;
            };
        };

        input_0 { /* Image from 4 cameras */
            id = <0x01>;
            fieldtype = <1>;
            resolution = <1280 4000>;
            frames = <30>;
            ofmt = <0x2006>;
        };
    };
};
```

Symmetric or asymmetric?

- A pair of TI DS90Ux9xx serializer and deserializer connected over FPD-Link III can be seen as a transparent bridge
- PCBs over FPD-Link III connection can extremely sophisticated devices, also these devices are disconnectable / replaceable, it is unavoidable to describe these devices separately in main board device trees, DT overlay mechanism works perfectly
- Serializer and deserializer pair is “reversible”, from hardware perspective there is no significant difference in video bridging from a display controller or to an image controller
- Still, looking from Linux running on an application SoC side, the difference between DRM and V4L2 frameworks shall be taken into account

Audio bridging

- Similar to video bridging there is no explicit controls of DS90Ux9xx audio bridging
- TI rightfully considers that audio bridging functionality might be optional in products, thus it is pinmuxed with GPIOs
- Hence audio bridging support and control is implemented as pinmux configuration
- To get a more flexible control audio device tree graphs can be considered
- v4l2_audio might be a reasonable option to choose for implementation

Similarities for a new bus

Re: [PATCH 4/7] mfd: ds90u09xx: add TI DS90U09xx de-/serializer MFD driver
From: Kieran Bingham @ 2018-10-12 11:47 UTC

[snip]

The use case whether they transfer frames from a camera or to a display are of course closely related, but ultimately covered by two separate subsystems at the pixel level (DRM vs V4L, or other for other data)

Perhaps as they are buses - on a level with USB or I2C (except they can of course carry I2C or Serial as well as 'bi-directional video' etc), they are looking for their own subsystem.

Except I don't think we don't want to add a new subsystem for just one (or two) devices...

- Maxim GMSL
- TI FPD-Link III
- SMSC/Microchip MOST
- Inova APIX
- ...

Current status

- The essential parts of DS90Ux9xx device drivers is sent for review, testing and discussion
- Luca Ceresoli <luca@lucaceresoli.net> sent his own device driver for DS90UB954 support
- The cornerstone of uncertainty is how to describe I2C bridging functionality
 - Multiple points of viewson the best possible device tree representation of the ICs
- All features of ICs are supported in the drivers framework and shipped to products

Linux device driver	Status
MFD	All features are supported, the driver is published
I2C bridge	All features are supported, the driver is published and under discussion
IRQ bridge	Trivial driver, not yet published though
Pinmux	All features are supported, the driver is published
GPIO	All features are supported, the driver is published
GPIO bridge	All features are supported, the driver is published
DRM	All features are supported, trivial driver based on <code>gpu/drm/bridge/lvds-encoder.c</code>
V4L2	Non-trivial driver, DS90Ux940 and DS90Ux964 are supported in unpublished drivers
Audio bridge	No separate driver, part of pinmux

Thank you for your attention!
Questions and comments are welcome.